

# RUSTFRIE PNEUMATISKE SYLINDERE


Sylindere basert på DIN/ISO 6432  
 Sylinder diameter: Ø12 - Ø25  
 Med magnet for avkjenning  
 Merk: Kun Ø25 har justerbar endeslagsdemping

Oppbygning av artikkelnummer:




## U - syl.diam. - slaglengde - forgavl - bakgavl

Eks.: Sylinder med brems og glatt forgavl samt glatt bakgavel med svingøye  
 Ø25x80 = U025 0080 0712

Alle gavlene kan fritt kombineres.

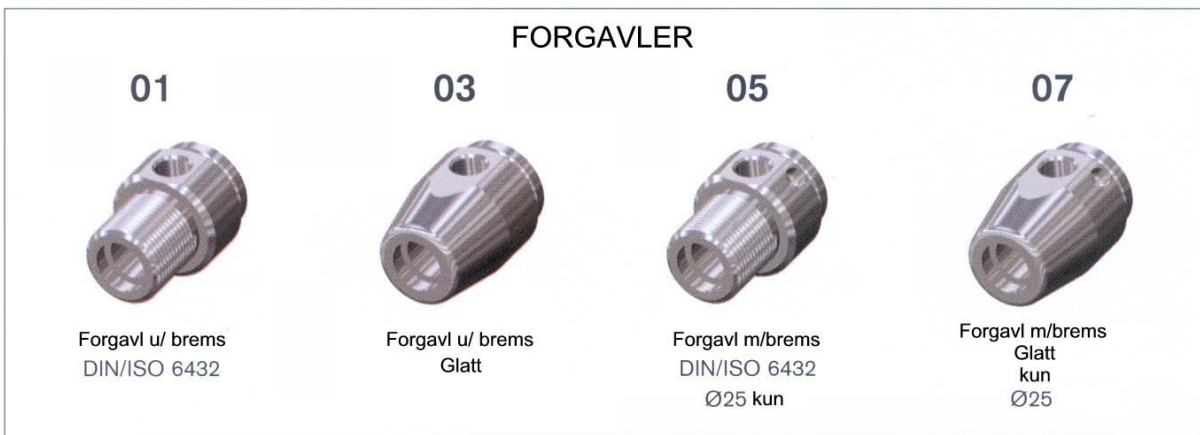

# RUSTFRIE PNEUMATISKE SYLINDERE

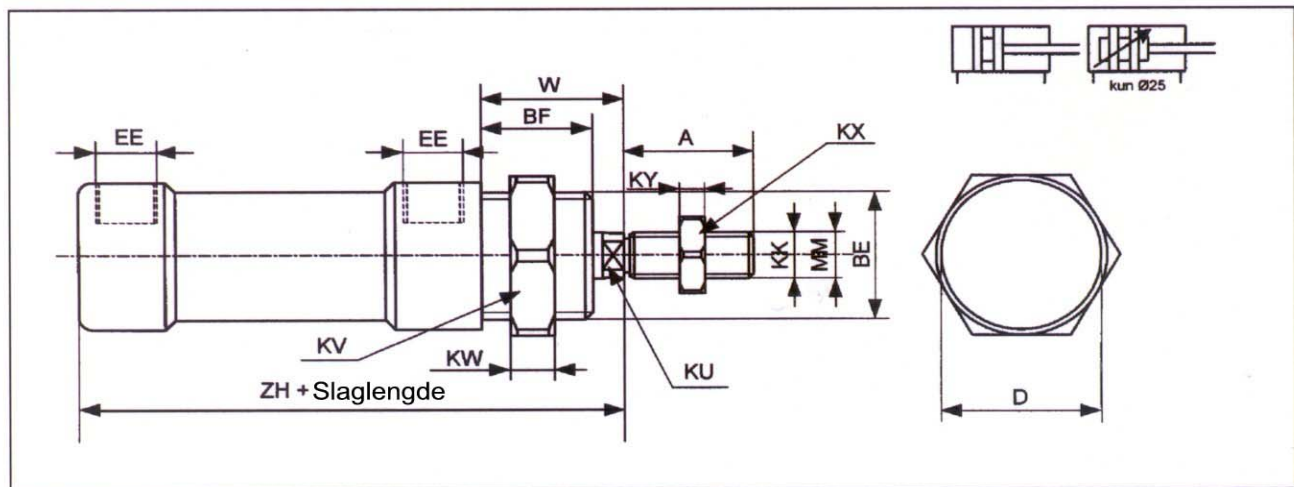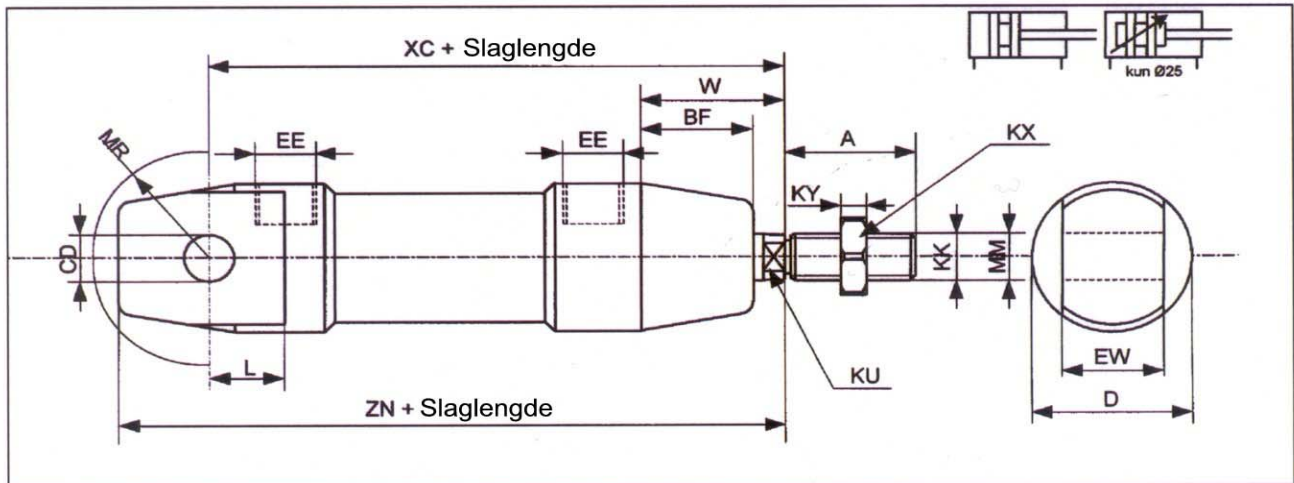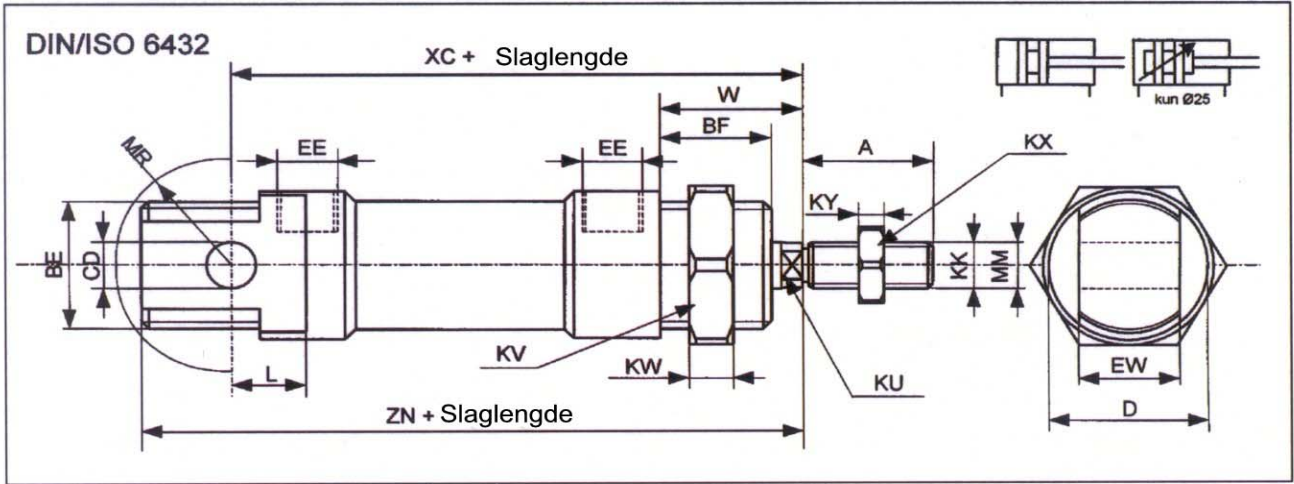

Syl. dia.	A*	BE*	BF	CD*	D	EE*	EW*	KK*	KU	KV	KW	KX	KY	L	MM	MR*	XC*	W	ZN	ZH
12	16	M16x1,5	15	6	20	M5	12	M6	5	24	7	10	5	9	Ø6	12	75	22	85	70
16	16	M16x1,5	16	6	20	M5	12	M6	5	24	7	10	5	9	Ø6	12	82	22	92	76
20	20	M22x1,5	18	8	25	G1/8"	16	M8	6	27	7	13	4	12	Ø8	18	95	24	108	90
25	22	M22x1,5	21	8	28	G1/8"	16	M10x1,25	8	27	7	17	5	12	Ø10	16	104	28	116	96